

Multiline-Strahler

68 – 300 MHz

BN 506 10007

- Verwendbar als Multiline-Strahler
- Abstimmbare im Bereich 68 – 300 MHz

Typ Nr. / BN	506 10007
Frequenzbereich	68 – 300 MHz
Antennengewinn (typisch)	0 dB (Referenz $\lambda/4$ Monopol)
Länge	1120 mm (durch Kürzen gemäß Längendiagramm auf Mittenfrequenz abgestimmt)
Gewindeschnittstelle	M6



Vorsicht

Der Strahler ist vor dem Einfahren in Autowaschanlagen abzunehmen!

- Material: Federstahl, schwarz.
- Montage: Durch Kürzen gemäß Längendiagramm auf Mittenfrequenz trimmen!
- Ersatzteil: Spitzenschutz K 66 01 9 – BN 510 159.

(Längendiagramm siehe Seite 2)



Strahler 506 10007

Strahler passend zu:




Antennenfuß 506 10004

Telefon GSM900/1800

GPS – SMA (Stift)

optionaler Strahler FME (Buchse)

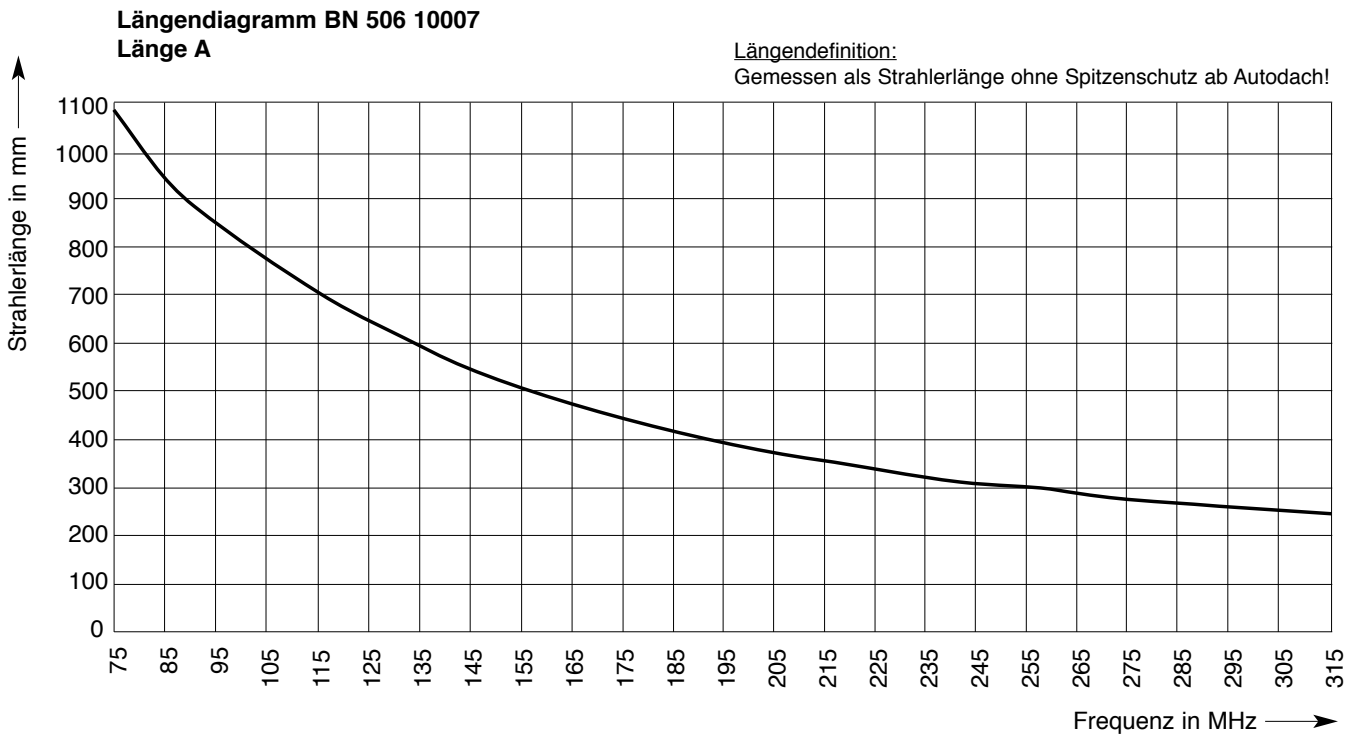

Multiline radiator

68 – 300 MHz

Order no. 506 10007

- May be used as multiline radiator
- Adjustable in the range of 68 – 300 MHz


Type no. / Order no.	506 10007
Frequency range	68 – 300 MHz
Gain (typ.)	0 dB (ref. $\lambda/4$ monopole)
Length	1120 mm (adjusted to mid-frequency by shortening acc. to length diagram)
Thread	M6



Remove radiator before entering car wash systems!

- Material: Spring steel, black.
- Note on mounting: Trim to mid-frequency by shortening acc. to diagram!
- Accessories: Tip protection K 66 01 9 – order no. 510 159.

(Length diagram see page 4)

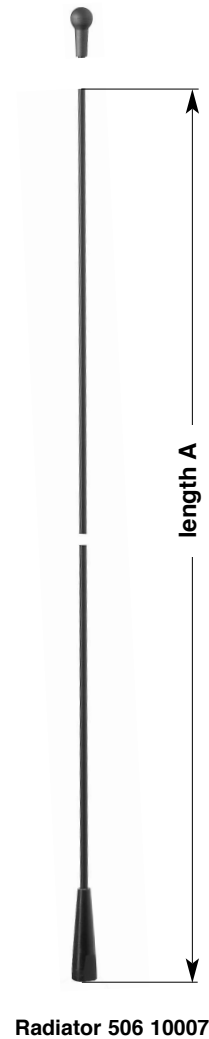

Radiator 506 10007

Radiator is appropriate for:



Antenna foot 506 10004

Telephone GSM900/1800

GPS – SMA (pin)

Optional antenna FME (socket)

Multiline radiator
68 – 300 MHz
Order no. 506 10007

